



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
X	EP 0 929 199 A (AMPHENOL CORP) 14 July 1999 (1999-07-14) * abstract; figures 1,6B,7C,15-17 *	1-10,14, 17-19	G02B6/38
X	US 5 675 682 A (DE MARCHI SILVERIO) 7 October 1997 (1997-10-07) * column 3, line 39 - line 46; figures 3-5 *	1-10	
X	EP 1 107 031 A (MOLEX INC) 13 June 2001 (2001-06-13) * abstract; figures 1,2,11 *	1-10,15	
X	US 5 530 787 A (ARNETT JAIME R) 25 June 1996 (1996-06-25) * abstract; figures 2,5 *	1-10,15	
X	US 4 418 983 A (BOWEN TERRY P ET AL) 6 December 1983 (1983-12-06) * abstract; figures 1,2,7 *	1-12,14, 16	
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 146 (P-206), 25 June 1983 (1983-06-25) -& JP 58 058510 A (SUMITOMO DENKI KOGYO KK), 7 April 1983 (1983-04-07) * abstract; figure 9 *	1-10,12	TECHNICAL FIELDS SEARCHED (Int.CI.7) G02B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 12 May 2003	Examiner Elflein, W
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 8410

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-05-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0929199	A	14-07-1999	US	5980312 A	09-11-1999
			EP	0929199 A1	14-07-1999
US 5675682	A	07-10-1997	AU	696950 B2	24-09-1998
			AU	4212296 A	29-08-1996
			DE	59600150 D1	20-05-1998
			EP	0729048 A1	28-08-1996
			JP	8248267 A	27-09-1996
EP 1107031	A	13-06-2001	US	6371657 B1	16-04-2002
			CN	1305248 A	25-07-2001
			EP	1107031 A1	13-06-2001
			JP	2001228368 A	24-08-2001
US 5530787	A	25-06-1996	AU	4576696 A	05-09-1996
			CA	2170438 A1	29-08-1996
			EP	0730176 A2	04-09-1996
			JP	8254622 A	01-10-1996
US 4418983	A	06-12-1983	AT	20391 T	15-06-1986
			CA	1196221 A1	05-11-1985
			DE	3271608 D1	17-07-1986
			DE	3280216 D1	23-08-1990
			EP	0061243 A1	29-09-1982
			EP	0154781 A2	18-09-1985
			HK	48389 A	23-06-1989
			SG	16789 G	07-07-1989
JP 58058510	A	07-04-1983	NONE		



ABSTRACT / ZUSAMMENFASSUNG / ABREGE

02018410.7

The present invention relates to a connecting device (7) for providing an optical connection between an apparatus (1) comprising an apparatus port (2) and provided for receiving and/or sending optical signals, and at least one optical fiber (5) comprising a connector (6). The connecting device (7) comprises a support plate (8) supporting at least one adapter (9). The adapter (9) comprises an adapter contact (11) adapted for a plug connection with the apparatus port (2) of the apparatus (1), and a connector contact (12) adapted for a plug and/or screw connection with the connector (6) of the fiber (5). The support plate (8) provides a grip for manually plugging in/off all of its adapters (9) simultaneously into/from the respective apparatus ports (2).



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02018410.7

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 10/09/02
LA HAYE, LE



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 02018410.7
Demande n°:

Anmeldetag:
Date of filing: 16/08/02
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Agilent Technologies, Inc.
Palo Alto, CA 94306
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Optical connecting device for coupling connectors to an apparatus with multiple ports

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

OPTICAL CONNECTING DEVICE FOR COUPLING CONNECTORS TO AN APPARATUS WITH MULTIPLE PORTS

BACKGROUND OF THE INVENTION

5 This invention refers to a connecting device for providing an optical connection.

In the measurement technology, a measuring apparatus usually has to be connected with a fiber to perform measurements, e.g. test and calibration measurements. Therefore, the apparatus comprises for each fiber a separate
10 apparatus port each adapted for a plug and/or screw connection with a connector provided at the end of the respective fiber.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved connecting. The
15 object is solved by the independent claims. Preferred embodiments are shown by the dependent claims.

Providing a connecting device comprising two or more adapters simplifies the performing of a plurality of connections. For an easy handling of the connectors
20 the operator needs enough space between adjacent apparatus ports, but at the housing of the apparatus the available space for arranging the apparatus ports is limited. The higher the density of the apparatus port arrangement the bigger the difficulty of handling the connectors and performing the respective connecting movement, which in particular is a plug and screw movement. Since the
25 connecting device according to the invention simplifies the handling of a plurality of connectors the user or operator need less time for the preparation of a measurement with a lot of fibers to be connected with the apparatus.

A preferred embodiment having plug contacts allows that only a pure plugging
30 movement, without any screw movement is necessary to establish the connection between at least two connectors and at least two apparatus ports. Therefore, it is possible to connect all connectors independently from the apparatus ports and independently from the apparatus to the respective adapters of one or more

support plates. After plugging and/or screwing the connectors into the connector contacts the adapters can be simply plugged with its adapter contacts into the apparatus ports of the apparatus. Since a pure plugging movement for connecting or disconnecting adapters and apparatus ports needs less space between adjacent apparatus ports the invention simplifies the plugging in and/or plugging off of the connectors and/or allows a higher density of apparatus ports at the apparatus.

In another embodiment the support plate provides a grip for substantially concurrently contacting all of its adapters with the respective apparatus ports to be contacted. Said grip simplifies the handling of the connecting device, in particular if the connecting device comprises a plurality of adapters.

According to a preferred embodiment the support plate supports two or more adapters, wherein all adapters of the support plate are arranged in a straight line. With help of this feature it is possible to arrange the adapters and therefore the apparatus ports with a close proximity leading to a high port density. All the more since the arrangement of the apparatus ports at the apparatus may be provided for coupling two or more connecting devices.

In another embodiment the connecting device comprises at least one locking device providing a fixed position between each pair of adapter and apparatus port plugged together. This feature ensures a secure and stable connection between the connectors and the apparatus ports.

In a further embodiment one or more adapters of the supporting plate are provided with such a locking device, and the support plate is provided for simultaneously adjusting the locking devices of all of its adapters between a locking state and a releasing state. Therefore, the securing and releasing of the adapters connected to the respective apparatus ports is easy to handle by the user or operator.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and many of the attendant advantages of the present invention will be readily appreciated and become better understood by reference to the following detailed description when considered in connection with the accompanying drawings. Features that are substantially or functionally equal or similar will be referred to with the same reference sign(s).

Fig. 1 depicts an isometric view of a connecting device according to the invention,

Fig. 2 depicts an isometric view of another connecting device.

Fig. 3 depicts an isometric view of a support plate,

Fig. 4 depicts an isometric view of an adapter holder,

Fig. 5 depicts an isometric view of a apparatus port,

Fig. 6 and 7 depict isometric views of a connecting device at different states.

DETAILED DESCRIPTION OF THE INVENTION

According to Fig. 1 and 2 an apparatus 1 is provided with a plurality optical apparatus ports 2. In Fig. 1 and 2 the apparatus 1 is represented by a portion 4 of its housing 3. This housing-portion 4 shows a multi-arrangement with eight apparatus ports 2. The apparatus 1 is provided for receiving and/or sending optical signals via its apparatus ports 2. Additionally, the apparatus 1 also may be provided for processing optical and/or electronic signals, in particular the apparatus 1 is provided as a measurement-instrument 1, e.g. to perform test and/or calibration measurements.

For signal input and/or output it is necessary to couple the apparatus 1 with several optical fibers 5. To this aim each fiber 5 is at its end provided with an optical connector 6, which has to be coupled with the respective apparatus port 2.

A preferred embodiment of such a connector 6 is provided for a plug and screw connection, i.e. a combined screw and plug movement has to be performed for plugging the connector 6 into a complementary contact in this contact. According to Fig. 1 and 2 the apparatus ports 2 are arranged with a high density at the housing 3. If these contacts would be adapted for a plug and screw connection it would be very difficult for the operator to couple all connectors 6 with the respective contacts due to ergonomic reasons.

To simplify the plugging in and/or plugging off the apparatus 1 according to the present invention comprises at least one connecting device 7 with a support plate 8. Each support plate 8 supports at least one adapter 9. The number of connecting devices 7 per apparatus 1 and the number of adapters 9 per support plate 8 depend on the respective apparatus port arrangement at the housing 3 of the respective apparatus 1. Therefore the apparatus 1 of Fig. 1 and 2 each comprises at least two connecting devices 7, wherein each supporting plate 8 of these connecting devices 7 comprises four adapters 9. In Fig 2 only one connecting device 7 is depicted.

Each adapter 9 comprises a connector contact 11 turned towards the viewer, formed complementary to the respective connector 6 and provided for a plug and/or screw connection between the connector contact 11 of the adapter 9 and one of the connectors 6. Since the respective connectors 6 are provided for a plug and screw connection, the complementary connector contacts 11 are adapted for a plug and screw connection, too. Turned away from the viewer each adapter 9 comprises an adapter contact 12 (see Fig. 4) provided for a plug connection between the adapter contact 12 of the adapter 9 and one of the apparatus ports 2. The adapter contacts 12 are complementary formed to the respective apparatus ports 2 and are also provided for a plug connection. Therefore it is very easy for the operator to perform a connection between the apparatus ports 2 and the adapter contacts 12 by a simple plugging movement.

Each supporting plate 8 comprises at its opposing ends two end portions 10 formed by bending the support plate 8 at its ends. These end portions 10 provide a grip for manually handling the connecting device 7 by the user or operator.

5 Referring to Fig. 1 and 2 all adapters 9 supported by the same support plate 8 are arranged in a straight line, wherein adjacent adapters 9 are in a close proximity to each other. Therefore the adapter arrangement does not need much space. According to this, the apparatus ports 2 assigned to the same connecting device 7 are also arranged in a straight line and adjacent apparatus ports 2 only have small
10 distances between each other. Therefore, it is possible to perform a apparatus port-arrangement at the housing 3 with a high density of apparatus ports 2. In a suitable embodiment the end portions 10 of the support plate 8 are arranged in the same straight line as the adapters 9 supported by this support plate 8.

15 The connecting device 7 according to the invention works as follows:

For coupling the apparatus 1 with a big number of fibers 5, e.g. forty fibers 5, the fibers 5 are divided up into several groups each comprising a small number of fibers 5 according to the number of adapters 9 per connecting device 7. Therefore,
20 in the example of Fig. 1 each group of fibers 5 comprises four fibers 5 and four connectors 6. The connectors 6 of each group of four fibers 5 are then plugged and/or screwed into the connector contacts 11 of the respective adapters 9. Since at this state the connection device 7 is separated from the housing 3 of the apparatus 1 the operator has enough space for manipulating the connectors 6.

25 After coupling all connectors 6 assigned to the respective connecting device 7 the operator uses the grip provided by the end portions 10 for plugging in simultaneously all adapter contacts 12 of the adapters 9 into the apparatus ports 2 assigned to this group of fibers 5. The arrangement of the apparatus ports 2 at the
30 housing 3 provides enough space for this plugging or coupling work. It should be clear, that the de-coupling of the fibers 5 from the apparatus 1 works vice versa.

In a preferred embodiment all connecting devices 7 and/or all support plates 8 and/or all fibers 5 and/or all connectors 6 and/or all adapters 9 and/or all apparatus ports 2 are of the same type. It is clear, that another embodiment may comprise two or more types of connecting devices 7 and/or of support plates 8 and/or of
5 fibers 5 and/or of connectors 6 and/or of adapters 9 and/or of apparatus ports 2. E.g. the different types of fibers 5 may be different with respect to the number of modes (single-mode fiber and multi-mode fiber). Different types of support plates 8 may be provided for different numbers of adapters 9 and/or may have different end portions 10. The adapter-types may be adapted for different apparatus ports 2
10 and/or for different connectors 6.

All types of support plates 8 and adapters 9 constitute a system for mounting connecting devices 7 of different types. With help of such a system it is very simple to generate connecting devices 7 individually adapted to the respective
15 apparatus 1 or to its apparatus port arrangement, respectively. Since the connecting devices 7 are individually provided for the use with the respective apparatus 1, this apparatus 1 and all connecting devices 7 assigned thereto constitute another system, in particular a signal processing system.

Fig. 3 depicts an end portion of the support plate 8 according to the example of Fig. 1. For each adapter 9 the support plate 8 comprises a first receiving opening 13 provided for inserting the adapter 9. According to Fig. 4 the outer shape of the
20 respective adapter 9 is formed complementary to the inner shape of the first receiving opening 13. The connector contact 11 of the adapter 9 comprises a second receiving opening 14 provided for a plug in and/or screw connection with the complementary type of connector 6.
25

In Fig. 5 the apparatus port 2 is depicted independently or separately from the respective housing 3 of the apparatus 1. The front side of the apparatus port 2 turned towards the viewer comprises a third receiving opening 20 provided for a
30 plugging connection with the adapter contact 12 of the adapter 9.

According to Fig. 6 and 7 the connecting device 7 is provided with at least one locking device 15. In the embodiment of Fig. 6 and 7 the locking device 15 is provided at one of the adapters 9, which is — for a better understanding — not shown in the Fig. 6 and 7. Such a locking device 15 comprises a pair of catching members 16 movably, in particular swingably, mounted at the respective adapter 9. To this aim each catching member 16 is fastened to a plate spring 17, which is secured to the respective adapter 9 not shown. E.g. this plate spring 17 is fixed at a plug 18 projecting at the outside of the adapter 9 (see Fig. 4). This plug 18 may be provided with a slot, in which the plate spring 17 is inserted. The locking device 15 also comprises a pin 19 projecting at the inside of the third receiving opening 20 (see Fig. 5 to 7).

For actuating the catching members 16 the locking device 15 comprises for each catching member 16 an actuating member 21 co-operating with the assigned catching member 16. In the shown preferred embodiments each actuating member 21 is a part of the support plate 8 formed by bending a suitably shaped portion of the support plate 8. The actuating members 21 are arranged at the edge of the first receiving opening 13 and are shaped as fingers projecting in the direction of the plugging movement between the adapter contact 12 of the adapter 9 and the respective apparatus port 2. At its outside the adapter 9 comprises two opposing guiding edges 22 extending parallel to the plugging direction (see Fig. 4). If the adapter 9 is inserted into the first receiving opening 13 the fingers or the actuating members 21 respectively co-operate with the guiding edges 22 and constitute a sliding fit between the adapter 9 and the support plate 8. Therefore the adapter 9 is relative to the support plate 8 and parallel to the plugging direction movably mounted at the support plate 8.

The Fig. 6 and 7 show supporting plates 8 comprising at least two first receiving openings 13. In this embodiment only one of the first receiving openings 13 is provided with the actuating members 21. In another embodiment not shown two or more, in particular all, first receiving openings 13 are provided with the actuating members 21. In a preferred embodiment the locking device 15 comprises two pairs of catching members 16 per adapter 9. Said pairs of catching members 16

are arranged at the outside of the adapter 9 at opposing sides. Consequently, the corresponding first receiving opening 13 also comprises two pairs of actuating members 21 arranged at opposing edge portions.

5 The locking device 15 works as follows:

The catching members 16 are movably mounted to the adapter 9 and therefore adjustable between a release position shown in Fig. 6 and a locking position shown in Fig. 7. In the locking position of Fig. 7 the catching members 16 embrace
10 the pin 19 at both sides providing a fixed position between the respective pair of adapter 9 and apparatus port 2 plugged together. Such a fixed coupling is necessary for a signal and/or data transmission with high performance. In the release position of Fig. 6 the catching members 16 release the respective pin 19 enabling a movement between the adapter 9 and the apparatus port 2 in the
15 plugging direction.

Since the connecting device 7 is plugged off from the respective apparatus ports 2 the actuating members 21 have the position according to Fig. 6 enabling the catching members 16 to swivel into their release position in which their free ends
20 are spaced apart from each other and form a gap 23 between each other.

While the adapters 9 get plugged into the corresponding apparatus ports 2 the pin 19 penetrates through this gap 23 into the space between the two catching members 16. As soon as the adapters 9 are completely plugged in into the
25 respective apparatus ports 2, the adapters 9 abut against the apparatus ports 2 and the actuating members 21 start moving in the plugging direction, if the operator still forces the support plate 8 in the plugging direction. Since the actuating members 21 get pushed in the plugging direction they consequently co-operate with the catching members 16 and urge them for a swivel movement,
30 wherein their free ends move towards each other and close the gap 23. At the end of this plug in movement the catching members 16 have reached their locking position embracing the pin 19. Additionally the pushed in actuating members 21

ensure this locking position, as long as the support plate 8 remains in this push-position shown in Fig. 7.

For plugging off the adapters 9 from the respective apparatus ports 2 the operator pulls at the support plate 8 of the connecting device 7. According to this plug off movement the actuating members 21 get pulled out and release the catching members 16. The spring tension of the plate spring 17 urges the catching members 16 into their release position. Therefore the catching members 16 automatically move into their release position as soon as the support plate 8 reaches the pull-position shown in Fig. 6. In this pull-position a distance between the bottom side of the support plate 8 and the top side of the adapters 9 is bigger as in the push-position according to Fig. 7. Since the catching members 16 have reached their releasing position the operator can pull off the connecting device 7 from the apparatus 1.

In the embodiment of Fig. 2 the locking device 15 comprises two buttons 24 for each connecting device 7, and two gripper members 25 integrated into the end portions 10 or handling grips 10 of the support plate 8. These gripper members 25 may be adapted for providing a passive fixation between support plate 8 and housing 3 by plugging the gripper members 25 onto the buttons 24. This fixation can be performed automatically by plugging the adapters 9 with the support plate 8 onto the apparatus ports 2. For releasing the fixation with the buttons 24 the gripper member 25 comprises a release lever 26, which can be manually activated by the operator.

In another embodiment not shown the support plate 8 also may be provided with a receptacle adapted for mounting a cable channel to the support plate 8. Such a cable channel receives, protects and guides the fibers 5 of the respective connecting device 7. Additionally, such a cable channel provides an organized arrangement of the plurality of fibers 5.

In a further embodiment at least one of the adapters 9 may be adapted for receiving at least one bare fiber 5. Thus, the respective fiber 5 doesn't need to be

coupled to the connector 6. The bare fiber 5 can be coupled directly to the adapter 9, and via the adapter 9 to the apparatus 1.

5 A remarkable advantage of the connecting device 7 according to the invention is the fact, that all connectors 6 coupled with the adapters 9 of the connecting device 7 can simultaneously be plugged in into the respective apparatus ports 2 or plugged off from the respective apparatus ports 2, respectively. Another important advantage is, that the adapter arrangement at the support plate 8 of the connecting device 7 and the apparatus port arrangement at the housing 3 of the
10 apparatus 1 can be performed with a maximum density. The latter advantage is the consequent result of the adapter principle of the connecting device 7. This feature allows the mounting of the connectors 6 to the adapters 9 independently from the apparatus ports 2. Therefore the operator has no problems with the small distances between adjacent apparatus ports 2 at the housing 3. In addition to that
15 the connection of the fibers to the measurement instrument 1 could be done a factor faster using the connecting devices 7 according to the invention. The factor is determined by the number of adapters per connecting device 7.

CLAIMS

1. A connecting device (7) adapted for providing an optical connection between
an apparatus (1) comprising a plurality of apparatus ports (2) for receiving
5 and/or sending optical signals, and at least one optical fiber (5) being coupled
to a connector (6), the connecting device (7) comprises a support plate (8)
supporting at least two adapters (9), each adapter (9) comprises an adapter
contact (11) adapted for providing a connection with one of the apparatus
ports (2) and a connector contact (12) adapted for providing a connection with
10 the connector (6).
2. The connecting device according to claim 1, wherein the support plate (8)
provides a grip for substantially concurrently contacting all of its adapters (9)
with the respective apparatus ports (2) to be contacted.
- 15 3. The connecting device according to claim 1 or any one of the above claims,
wherein the adapter contacts (11) and the apparatus ports (2) are adapted for
providing a plug connection.
- 20 4. The connecting device according to claim 1 or any one of the above claims,
wherein the connector contacts (12) and the connectors (6) are adapted for
providing a plug and/or screw connection.
5. The connecting device according to claim 1 or any one of the above claims,
25 wherein
 - the support plate (8) supports at least two adapters (9),
 - all adapters (9) of the support plate (8) are arranged in a straight line.
6. The connecting device according to claim 1 or any one of the above claims,
30 wherein two opposing end portions (10) of the support plate (8) provide the
grip.

7. The connecting device according to claim 1 or any one of the above claims, wherein the end portions (10) and the adapters (9) are arranged in a straight line.
- 5 8. The connecting device according to claim 1 or any one of the above claims, wherein
- the adapter contacts (12) of at least two adapters (9) are adapted for the same apparatus port type, and/or
 - the adapter contacts (12) of at least two adapters (9) are adapted for different
 - 10 apparatus port types, and/or
 - the connector contacts (11) of at least two adapters (9) are adapted for the same connector type, and/or
 - the connector contacts (11) of at least two adapters (9) are adapted for different connector types.
- 15 9. The connecting device according to claim 1 or any one of the above claims, wherein
- at least one adapter (9) is adapted for a single-mode connector (6) and apparatus port (2), and/or
 - 20 - at least one adapter (9) is adapted for a multi-mode connector (6) and apparatus port (2).
10. The connecting device according to any of the claims 1 to 6, wherein the connecting device (7) comprises at least one locking device (15) providing a
- 25 fixed position between each pair of adapter (9) and apparatus port (2) plugged together.
11. The connecting device according to claim 1 or any one of the above claims, wherein
- 30 - at least one of the adapters (9) is provided with such a locking device (15),
 - the support plate (8) is provided for simultaneously adjusting the locking devices (15) of all of its adapters (9) between a locking state and a releasing state.

12. The connecting device according to claim 1 or any one of the above claims,
wherein

- each locking device (15) comprises at least one catching member (16)
5 mounted at the adapter (9) and movable between a locking position and a
release position,
- in the locking position the catching member (16) embraces a pin (19) of the
apparatus port (2),
- in the release position the catching member (16) releases the pin (19).

10 13. The connecting device according to claim 12, wherein

- the locking device (15) comprises a release and/or locking mechanism
adapted for providing the release position and/or the locking position by
activating the release and/or locking mechanism, and/or
- 15 - the locking device (15) is adapted for providing the release position and/or the
locking position passively by plugging the connecting device (7) or by pulling
the connecting device (7), respectively.

20 14. The connecting device according to claim 1 or any one of the above claims,
wherein the adapter (9) is provided for receiving at least one bare fiber (5).

25 15. The connecting device according to claim 1 or any one of the above claims,
wherein the support plate (8) is provided with a receptacle adapted for
mounting a cable channel receiving, protecting and guiding the fibers (5) of
each connecting device (7).

16. The connecting device according to claim 1 or any one of the above claims,
wherein

- each adapter (9) is relative to the support plate (8) and parallel to the plugging
30 direction movably mounted at the support plate (8)
- the support plate (8) comprises at least one actuating member (21) co-
operating with at least one catching member (16) of the adapter (9),

- a plug in movement of the support plate (8) pushes the actuating member (21) for urging the respective catching member (16) into its locking position,
- a plug off movement of the support plate (8) pulls the actuating member (21) for releasing the respective catching member (16) into its release position.

5

17. A system, in particular a signal processing system, comprising

- at least one apparatus (1) comprising a plurality of apparatus ports (2) for receiving and/or sending optical signals,
- a plurality of optical fibers (5) each being coupled to a connector (6),
- 10 - at least one connecting device (7) adapted for providing optical connections between at least two of said apparatus ports (2) and at least two of said connectors (6),
- wherein the connecting device (7) comprises a support plate (8) supporting at least two adapters (9),
- 15 - wherein each adapter (9) comprises an adapter contact (12) adapted for providing a connection with one of the apparatus ports (2), and a connector contact (11) adapted for providing a connection with one of said connectors (6).

- 20 18. The system according to claim 17, wherein all apparatus ports (2) assigned to the same connecting device (7) are arranged in a straight line.

19. A system for mounting a connecting device (7) according to any of the claims 1 to 16, comprising

- 25
- at least two types of support plates (8) adapted for different types and/or numbers of adapters (9), and/or
 - at least two types of adapters (9) adapted for different connectors (6) and/or apparatus ports (2).

30



ABSTRACT

The present invention relates to a connecting device (1) for providing an optical connection between an apparatus (1) comprising a apparatus port (2) and
5 provided for receiving and/or sending optical signals, and at least one optical fiber (5) comprising a connector (6). The connecting device (7) comprises a support plate (8) supporting at least one adapter (9). The adapter (9) comprises an adapter contact (11) adapted for a plug connection with the apparatus port (2) of the apparatus (1), and a connector contact (12) adapted for a plug and/or screw
10 connection with the connector (6) of the fiber (5). The support plate (8) provides a grip for manually plugging in/off all of its adapters (9) simultaneously into/from the respective apparatus ports (2).

(Fig. 1)

1/3

EPO - Munich
80
16. Aug. 2002

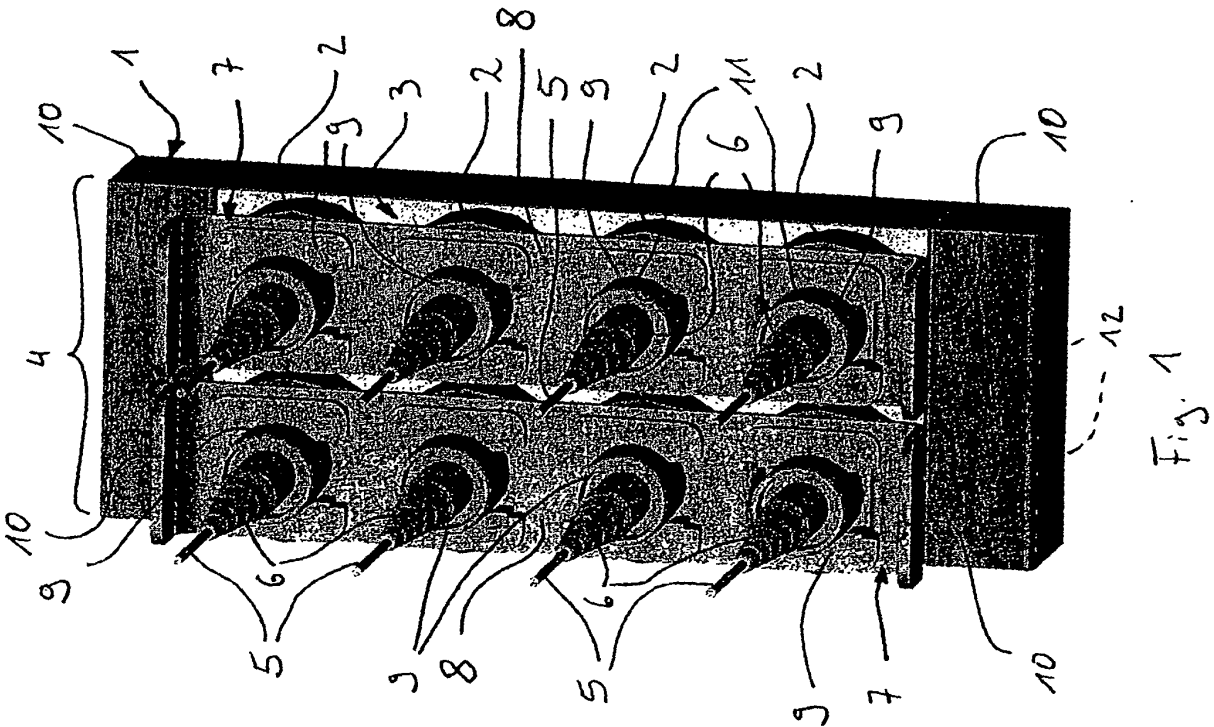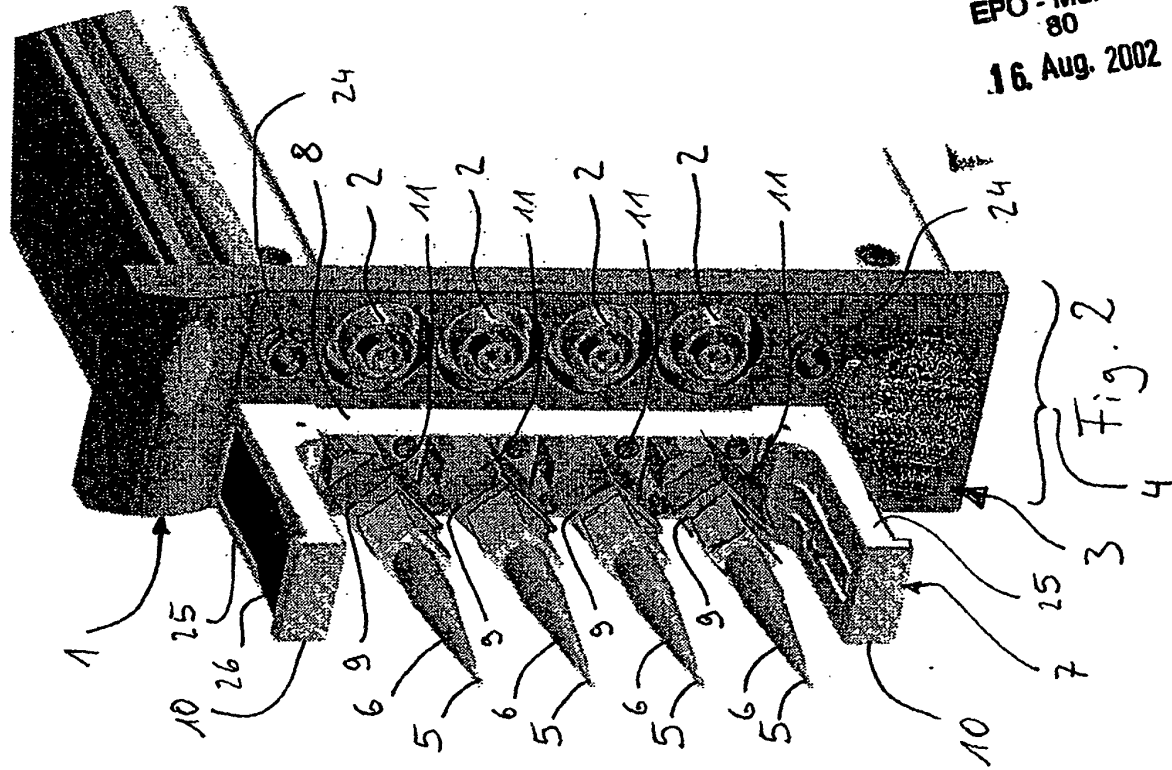

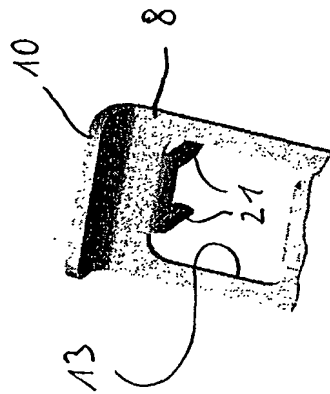


Fig. 3

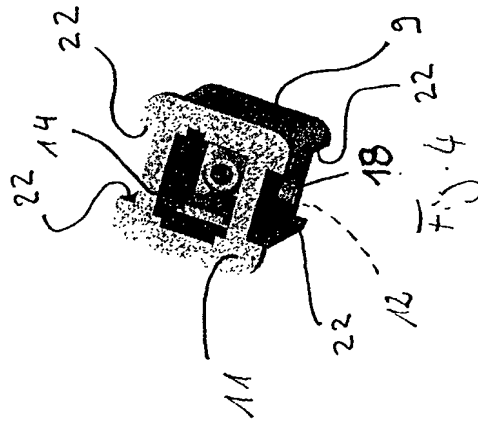


Fig. 4

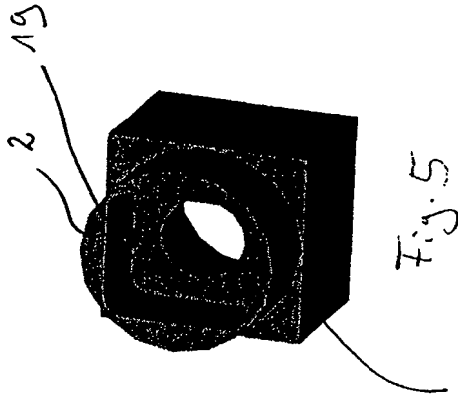


Fig. 5

20

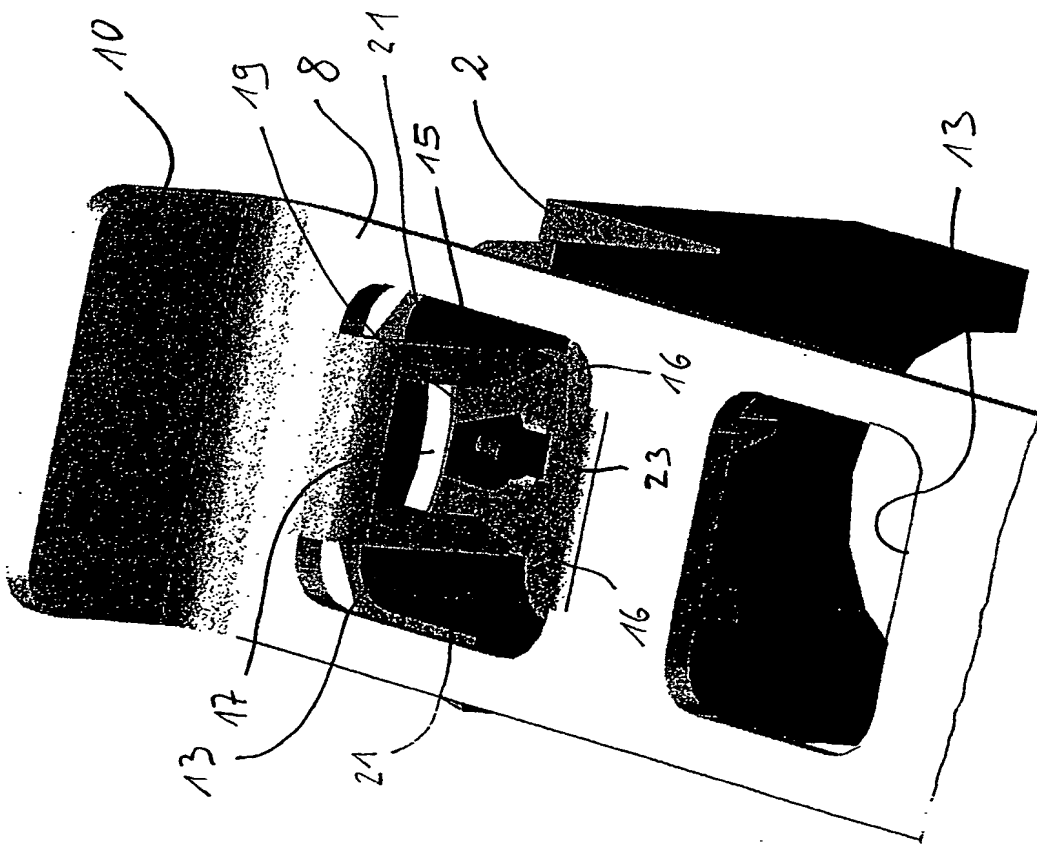


Fig. 6

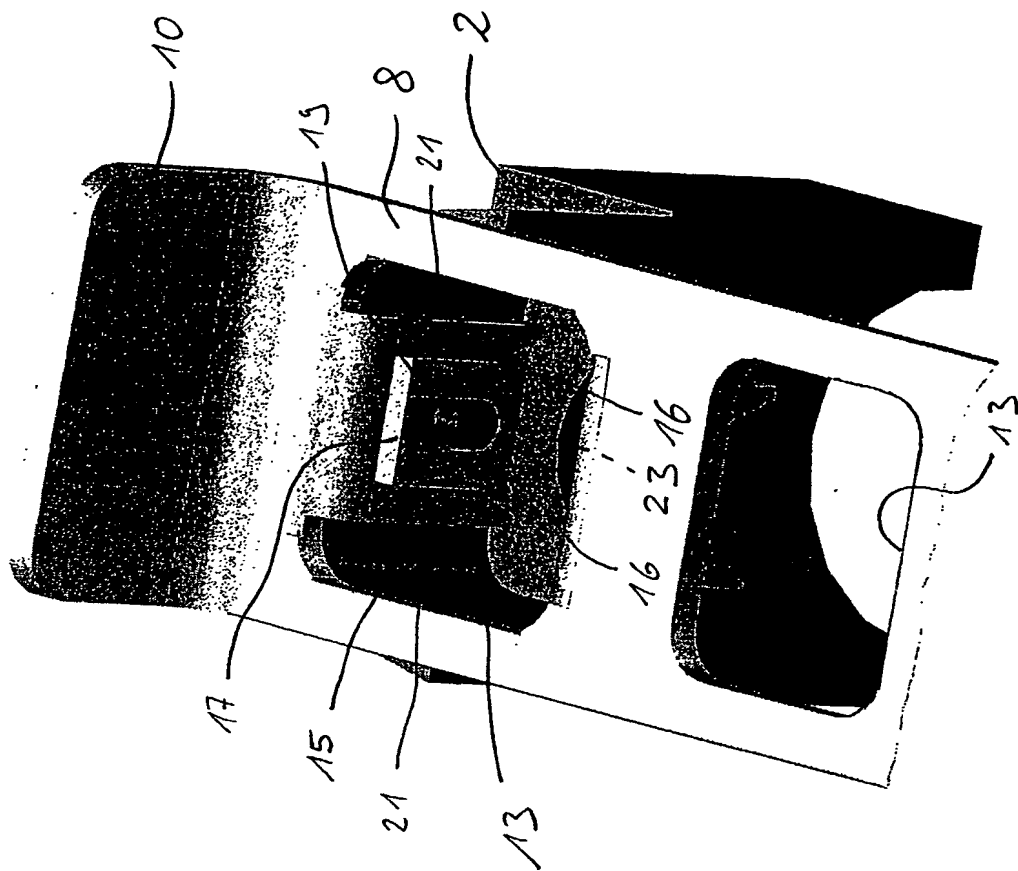


Fig. 7

